

ShadowCam instrument (top) with a focused view of the electronics and radiator (right).

ShadowCam Seeing in the Shadows

ShadowCam is a NASA-funded instrument hosted onboard the Korea Aerospace Research Institute (KARI) Korea Pathfinder Lunar Orbiter (KPLO) satellite. By collecting high-resolution images of the Moon’s permanently shadowed regions (PSRs), ShadowCam provides critical information about the distribution and accessibility of water ice and other volatiles at spatial scales (1.7 m/pixel) required to mitigate risks and maximize the results of future exploration activities.

The Moon’s PSRs never see direct sunlight and are illuminated only by light reflected from nearby topographic highs. This secondary illumination is very dim. To see details within the PSRs, ShadowCam was designed to be over 200 times more sensitive than previous imagers, like the Lunar Reconnaissance Orbiter Camera Narrow Angle Camera (LROC NAC). As a result, ShadowCam images will allow for unprecedented views into the shadows but will saturate while imaging sunlit terrain.

Science Objectives

- 1. Map albedo patterns in PSRs and interpret their nature:** ShadowCam will search for frost, ice, and lag deposits by mapping reflectance with resolution and signal-to-noise ratios comparable to LROC NAC images of illuminated terrain.
- 2. Investigate the origin of anomalous radar signatures associated with some polar craters:** ShadowCam will determine whether high-purity ice or rocky deposits are present inside PSRs.
- 3. Document and interpret temporal changes of PSR albedo units:** ShadowCam will search for seasonal changes in volatile abundance in PSRs by acquiring monthly observations.

- 4. Provide hazard and trafficability information within PSRs for future landed elements:** ShadowCam will provide optimal terrain information necessary for polar exploration.
- 5. Map the morphology of PSRs to search for and characterize landforms that may be indicative of permafrost-like processes:** ShadowCam will provide unprecedented images of PSR geomorphology at scales that enable detailed comparisons with terrain anywhere on the Moon.

ShadowCam was built by Malin Space Science Systems in San Diego California. For more ShadowCam information, news, and images, about ShadowCam, visit online at shadowcam.sese.asu.edu. For more information about the KPLO satellite and KARI, visit www.kari.re.kr/eng/sub03_07_01.do

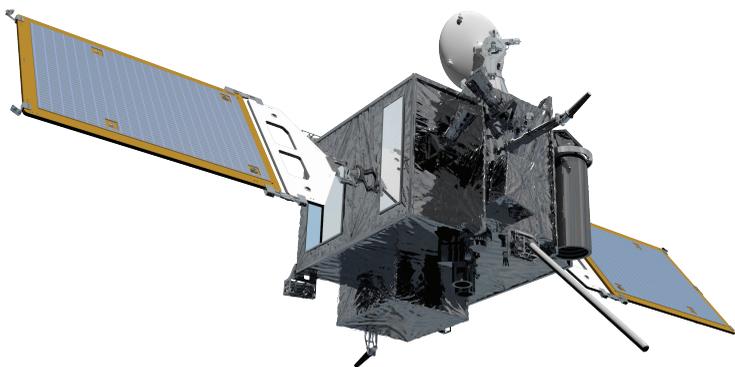



Illustration of KPLO satellite (courtesy of KARI).



The first ShadowCam image from orbit reveals the permanently shadowed wall and floor of Shackleton crater in never before seen detail. Image 2040 meters wide, ShadowCam M012728826 [NASA/KARI/ASU].

ShadowCam Characteristics

Camera Design	Time Delay Integration pushbroom
FOV (cross track)	2.86°
Pixel Scale	1.7 meter
Signal-to-Noise Ratio	> 90
Pixel Size	12 μm
Instantaneous FOV	17.16 μrad
Sensor Width	3144 (3072 scene; 72 calibration) pixels
Image Size (sensing pixels)	3072 (cross-track), 84992 (down-track)
Image Footprint (100 km alt.)	5.2 km × 144 km
Optics	f/3.6 Cassegrain (Ritchey-Chretien)
Focal Length	700 mm
Primary Mirror Diameter	195 mm
MTF (@Nyquist)	> 0.2
Aperture	194.4 mm
Effective TDI Lines	32
Sensitivity	> 200× the LROC NAC sensitivity
Mass	8.75 kg
Volume	118 × 27 cm (w/radiator)
Peak, Standby Power	9.3, 4.5 W
Average Power	6.4 W
Spectral Response	410–780 nm

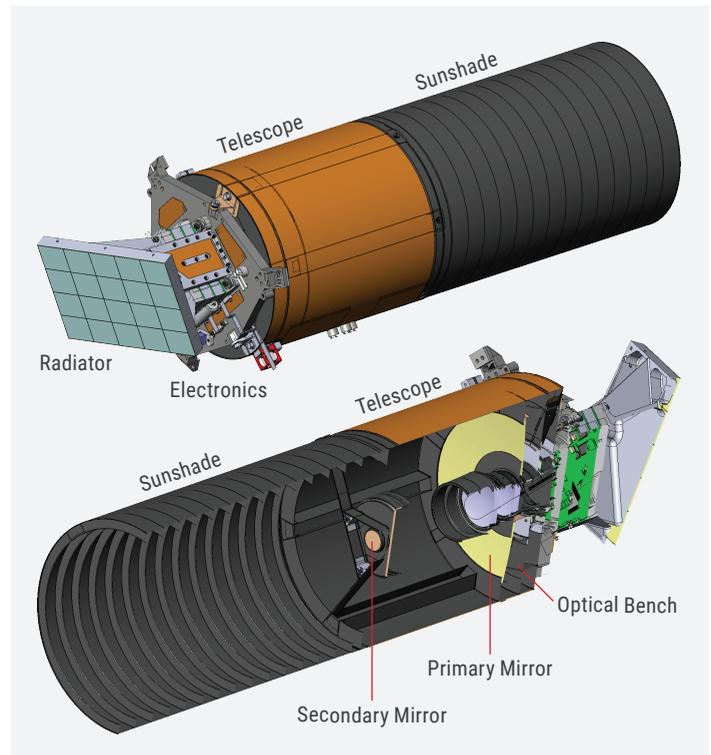

Labeled drawing of the ShadowCam instrument (top) and cross-section (bottom) showing the internal optics and mirrors.

Science and Operations Team*

Mark Robinson	Principal Investigator (P.I.)	Arizona State University	Paul Lucey	Co-Investigator	University of Hawaii
Prasun Mahanti	Deputy P.I.	Arizona State University	Erwan Mazarico	Co-Investigator	Goddard Space Flight Center
Ben Bussey	Co-Investigator	Applied Physics Laboratory	Michael Ravine	Co-Investigator	Malin Space Science Systems
Lynn Carter	Co-Investigator	University of Arizona	Emerson Speyerer	Co-Investigator	Arizona State University
Brett Denevi	Co-Investigator	Applied Physics Laboratory	Robert Wagner	Co-Investigator	Arizona State University
Nicholas Estes	Co-Investigator	Arizona State University	Shuai Li	Participating Scientist	University of Hawaii
Dave Humm	Co-Investigator	Spicacon	Jean-Pierre Williams	Participating Scientist	University of California Los Angeles
Mallory Kinczyk	Co-Investigator	Applied Physics Laboratory			

*Key LROC personnel leveraged to build, operate, and analyze observations.